




Constant Flow Handline Nozzle 95 GPM

Features

- Brass Construction
- Standard optimum operating pressure 100 PSI
- 1-1/2" FNST Inlet
- Constant single flow
- Combination of fog and straight stream
- Large rubber bumper
- Large rubber handle
- Removable pistol grip
- Flush mechanism
- Durable chrome plated ball shut off
- Heavy-duty spinning teeth for powerful fog pattern
- Dual trunion drive on ball shut off
- Conforms to all aspects of NFPA 1964 Standards

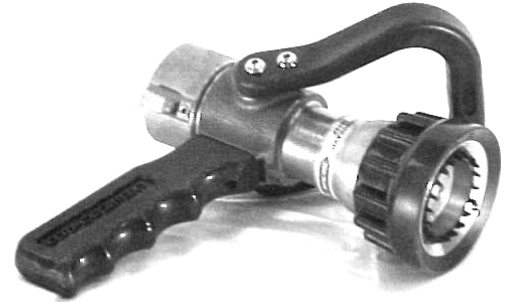

Suitable

- Suitable with water, In-line Eductors, AFFF, AR-AFFF and Class "A" foam solutions
- Refineries, Offshore Platforms, Chemical Plants, Storage Facilities, Fire Department and more

Accessories

- Repair Kit Part #RK1006B
- Quick Clamp-On Foam Tube Part #CFT

Part No:	GPM	Inlet	Weight	Length	Material
SB95	95	1.5" FNST	7.5 LBS.	9 IN.	BRASS
*SB95P	95	1.5" FNST	7.5 LBS.	9 IN.	BRASS
*SB95NPSHP	95	1.5" NPSH	7.5 LBS.	9 IN.	BRASS

*Pistol Grip

CHEM GUARD
204 S. 6th Ave • Mansfield, Tx 76063 • (817) 473-9964 • (817) 473-0606

www.chemguard.com